THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT	WIRE RANGE AWG [mm²]	TAB SIZE	DIMENSIONS in. [mm]				
PART #		INCH [mm]	$L\pm\frac{.03}{[0,8]}$	$W\pm \frac{.01}{[0,3]}$	H± .01 [0,3]		
ED18-250MB	#22-18 [0,5-1,0]	.250 X .032	.69 [17,4]	.25 [6,3]	.03 [0,8]		
ED14-250MB	#16-14 [1,5-2,5]	[6,3 X 0,8]	.69 [17,4]	.25 [6,3]	.03 [0,8]		

## NOTES:

- 1. USED FOR:
  - A. STRANDED COPPER WIRE ONLY
  - B. 302°F [150°C] MAX. OPERATING TEMPERATURE
  - C. 2000 V. MAX VOLTAGE RATING
- 2. MATERIAL:

A. STAMPING: .016" [.41] THK. BRASS, NICKEL PLATED

- 3. INSTALLATION TOOLS: CT-100A, CT-200, CT-260, CT-600A (CT-570CH), CT-2500(CT-2570CH)
- 4. WIRE STRIP LENGTH: 9/32" +1/32 [7,1mm +0,8]
- 5. SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- 6. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

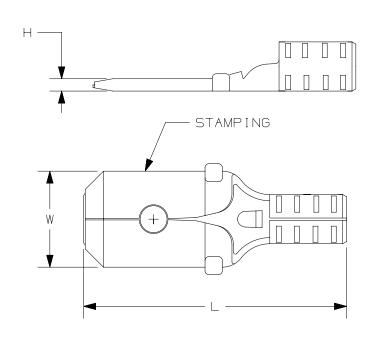

								,				
A								STRONGHOLD MALE DISCONNECT (250 SERIES) NON-INSULATED, BUTTED SEAM #22-14 AWG				
								CUSTOMER DRAWING				WING
								TITEM REVISION NAME  00123SHX/00  DATASET FILE NAME			PANDUIT	
								00123SHX_DC/00				
										MATERIAL:		
								l .	.1 [2.54] .01 [.25]	.XXX ±	5 °	SEE NOTES
DA/12	00	2/18	JHNU	TMR	RGB	RELEASED	00123SH		<b>-</b>		RD ANGLE DJECTION	DRAWING NUMBER: SH41320
D10100D	REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	JHNU	2/18	TMR	N.T.S.	SHEET 1 OF 1
					A							