

# Low-Voltage, Low RON Quad SPST Analog Switch

#### DESCRIPTION

The DG2041/2042/2043 are quad single-pole/single-throw monolithic CMOS analog switch designed for high performance switching of analog signals. Combining low power, fast switching, low on-resistance ( $R_{DS(on)}$ : 1  $\Omega$  at 2.7 V) and small physical size, the DG2041/2042/2043 are ideal for portable and battery powered applications requiring high performance and efficient use of board space.

The DG2041/2042/2043 are built on Vishay Siliconix's new high density low voltage process. An epitaxial layer prevents latchup.

Each switch conducts equally well in both directions when on, and blocks up to the power supply level when off.

#### FEATURES

- Low Voltage Operation (1.8 V to 5.5 V)
- Low On-Resistance R<sub>DS(on)</sub>: 1 Ω
- Fast Switching 14 ns t<sub>ON</sub>
- Low Charge Injection Q<sub>INJ</sub>: 1 pC
- Low Power Consumption
- TTL/CMOS Compatible
- TSSOP-16 and QFN-16 Packages
- Material categorization: For definitions of compliance please see <u>www.vishay.com/doc?99912</u>


#### BENEFITS


- Reduced Power Consumption
- Simple Logic Interface
- High Accuracy
- Reduce Board Space

#### **APPLICATIONS**

- Cellular Phones
- Communication Systems
- Portable Test Equipment
- · Battery Operated Systems
- Sample and Hold Circuits

#### FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION - DG2041

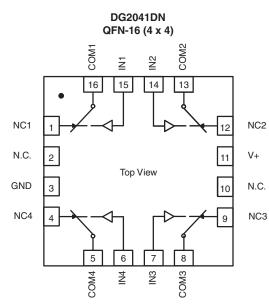



TRUTH TABLE - DG2041						
Logic	Switch					
0	On					
1	Off					

Switches Shown for Logic "0" Input

Document Number: 72091


S13-1285-Rev. C, 27-May-13


For technical questions, contact: pmostechsupport@vishay.com

www.vishay.com



#### FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION - DG2042, DG2043

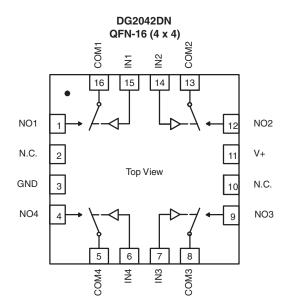





#### TRUTH TABLE - DG2042

Logic	Switch						
0	Off						
1	On						

Switches Shown for Logic "0" Input

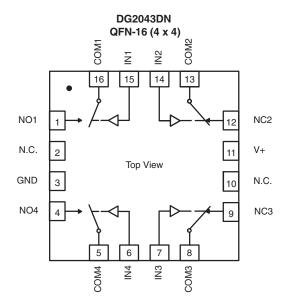



TRUTH TABLE - DG2043						
Logic	Switches 1, 4	Switches 2, 3				
0	Off	On				
1	On	Off				

Switches Shown for Logic"0" Input

www.vishay.com 2 For technical questions, contact: pmostechsupport@vishay.com

Document Number: 72091 S13-1285-Rev. C, 27-May-13



ORDERING INFORMATION						
Temp Range	Package	Part Number				
		DG2041DQ-T1				
		DG2041DQ-T1-E3				
	TSSOP-16	DG2042DQ-T1				
		DG2042DQ-T1-E3				
- 40 °C to 85 °C		DG2043DQ-T1				
		DG2043DQ-T1-E3				
		DG2041DN-T1-E4				
	QFN-16 (4 mm x 4 mm) (Variation 1)	DG2042DN-T1-E4				
	(variation T)	DG2043DN-T1-E4				

ABSOLUTE MAXIMUM RATINGS							
Parameter		Symbol	Limit	Unit			
Reference V+ to GND			- 0.3 to + 6	v			
IN, COM, NC, NO <sup>a</sup>			- 0.3 to (V+ + 0.3)	v			
Continuous Current (Any terminal)		± 50	mA				
Peak Current (Pulsed at 1 ms, 10 % c	luty cycle)		± 200	ma			
Storage Temperature (D Suffix)			- 65 to 150	°C			
	TSSOP-16 <sup>c</sup>		450	mW			
Power Dissipation (Packages) <sup>b</sup>	QFN-16 (4 mm x 4 mm) <sup>d</sup>		1880	11100			

Notes:

a. Signals on NC, NO, or COM or IN exceeding V+ will be clamped by internal diodes. Limit forward diode current to maximum current ratings.

b. All leads welded or soldered to PC board.

c. Derate 5.6 mW/°C above 70  $^\circ\text{C}$ 

d. Derate 23.5 mW/°C above 70 °C

e. Manual soldering with soldering iron is not recommended for leadless components. The QFN is a leadless package. The end of the lead terminal is exposed copper (not plated) as a result of the singulation process in manufacturing. A solder fillet at the exposed copper lip cannot be guaranteed and is not required to ensure adequate bottom side solder interconnection.

SPECIFICATIONS (V+ = 2 V)								
		Test Conditions Otherwise Unless Specified		- 40	Limits 0 °C to 85	°C		
Parameter	Symbol	$V+ = 2 V, V_{IN} = 0.4 V \text{ or } 1.6 V^{e}$	Temp. <sup>a</sup>	Min. <sup>b</sup>	Typ. <sup>c</sup>	Max. <sup>b</sup>	Unit	
Analog Switch			-					
Analog Signal Range <sup>d</sup>	V <sub>NO</sub> , V <sub>NC</sub> V <sub>COM</sub>		Full	0		V+	V	
On- Resistance	R <sub>ON</sub>	V+ = 2 V, V <sub>COM</sub> = 0.2 V/1.2 V, I <sub>NO</sub> , I <sub>NC</sub> = 10 mA	Room Full		3	6.3 6.3		
R <sub>ON</sub> Flatness <sup>d</sup>	R <sub>ON</sub> Flatness	V+ = 2 V, V <sub>COM</sub> = 0 V to V+, I <sub>NO</sub> , I <sub>NC</sub> = 10 mA	Room			4.2	Ω	
R <sub>ON</sub> Match Between Channels	$\Delta R_{ON}$		Room			0.4		
Switch Off Lookaga Current <sup>f</sup>	I <sub>NO(off)</sub> I <sub>NC(off)</sub>	V+ = 2.2 V V <sub>NO</sub> , V <sub>NC</sub> = 0.2 V/2 V, V <sub>COM</sub> = 2 V/0.2 V	Room Full <sup>d</sup>	- 1 - 10		1 10		
Switch Off Leakage Current <sup>r</sup>	I <sub>COM(off)</sub>		Room Full <sup>d</sup>	- 1 - 10		1 10	nA	
Channel-On Leakage Current <sup>f</sup>	I <sub>COM(on)</sub>	V+ = 2.2 V, V <sub>NO</sub> , V <sub>NC</sub> = V <sub>COM</sub> = 0.2 V/2 V	Room Full <sup>d</sup>	- 1 - 10		1 10		



<b>SPECIFICATIONS</b> $(V + = 2 V)$							
		Test Conditions Otherwise Unless Specified		- 4(	Limits 0 °C to 85	5 °C	
Parameter	Symbol	$V+$ = 2 V, $V_{IN}$ = 0.4 V or 1.6 $V^{e}$	Temp. <sup>a</sup>	Min. <sup>b</sup>	Typ. <sup>c</sup>	Max. <sup>b</sup>	Unit
Digital Control							
Input High Voltage	V <sub>INH</sub>		Full	1.6			v
Input Low Voltage	V <sub>INL</sub>		Full			0.4	v
Input Capacitance <sup>d</sup>	C <sub>in</sub>		Full		4		pF
Input Current	I <sub>INL</sub> or I <sub>INH</sub>	V <sub>IN</sub> = 0 V or V+	Full	- 1		1	μA
Dynamic Characteristics							
Turn-On Time	t <sub>ON</sub>	$V_{NO}~\text{or}~V_{NC}$ = 1.5 V, $R_L$ = 300 $\Omega,~C_L$ = 35 pF	Room Full <sup>d</sup>		30	81 82	
Turn-Off Time	t <sub>OFF</sub>	fig. 1 and 2	Room Full <sup>d</sup>		22	41 42	ns
Break-Before-Make Time Delay	t <sub>D</sub>	$V_{NO} \text{ or } V_{NC} = 1.5 \text{ V}, \text{ R}_{L} = 300 \Omega, \text{ C}_{L} = 35 \text{ pF}$ (DG2043 Only)	Room	5			
Charge Injection <sup>d</sup>	Q <sub>INJ</sub>	$C_L$ = 1 nF, $V_{GEN}$ = 0 V, $R_{GEN}$ = 0 $\Omega$ , fig. 2	Room		1		рС
Off-Isolation <sup>d</sup>	OIRR	R <sub>1</sub> = 50 Ω, C <sub>1</sub> = 5 pF, f = 1 MHz	Room		- 63		
Crosstalk <sup>d</sup>	X <sub>TALK</sub>	$H_{L} = 50.52, G_{L} = 5 \text{ pr}, T = T \text{ MHz}$	Room		- 95		dB
NO, NC Off Capacitance <sup>d</sup>	C <sub>NO(off)</sub> C <sub>NC(off)</sub>	V <sub>IN</sub> = 0 V or V+, f = 1 MHz	Room		24		pF
Channel-On Capacitance <sup>d</sup>	C <sub>ON</sub>		Room		48		
Power Supply					•	•	
Power Supply Current <sup>d</sup>	l+	V <sub>IN</sub> = 0 V or V+			0.001	1	μA

SPECIFICATIONS (V+ = 3 V)							
		Test Conditions Otherwise Unless Specified			Limits 40 to 85 °	С	
Parameter	Symbol	V+ = 3 V, $\pm$ 10 %, V <sub>IN</sub> = 0.4 V or 2 V <sup>e</sup>	Temp. <sup>a</sup>	Min. <sup>b</sup>	Typ. <sup>c</sup>	Max. <sup>b</sup>	Unit
Analog Switch	•		8				
Analog Signal Range <sup>d</sup>	V <sub>NO</sub> , V <sub>NC</sub> V <sub>COM</sub>		Full	0		V+	V
On-Resistance	R <sub>ON</sub>	V+ = 2.7 V, V <sub>COM</sub> = 0.7 V/1.5 V, I <sub>NO</sub> , I <sub>NC</sub> = 10 mA	Room Full		1.6	2.1 2.2	
R <sub>ON</sub> Flatness <sup>d</sup>	R <sub>ON</sub> Flatness	V+ = 2.7 V, V <sub>COM</sub> = 0 V to V+, $I_{NO}$ , $I_{NC}$ = 10 mA	Room			0.7	Ω
R <sub>ON</sub> Match Between Channels	$\Delta R_{ON}$		Room			0.3	
Switch Off Leakage Current <sup>f</sup>	I <sub>NO(off)</sub> I <sub>NC(off)</sub>	V+ = 3.3 V	Room Full	- 1 - 10		1 10	
Switch On Leakage Suitchi	I <sub>COM(off)</sub>	$V_{NO}$ , $V_{NC}$ = 0.3 V/3 V, $V_{COM}$ = 3 V/0.3 V	Room Full	- 1 - 10		1 10	nA
Channel-On Leakage Current <sup>f</sup>	I <sub>COM(on)</sub>	V+ = 3.3 V, V <sub>NO</sub> , V <sub>NC</sub> = V <sub>COM</sub> = 0.3 V/3 V	Room Full	- 1 - 10		1 10	
Digital Control							
Input High Voltage <sup>d</sup>	V <sub>INH</sub>		Full	1.6			v
Input Low Voltage	V <sub>INL</sub>		Full			0.4	v
Input Capacitance <sup>d</sup>	C <sub>in</sub>		Full		4		pF
Input Current	I <sub>INL</sub> or I <sub>INH</sub>	V <sub>IN</sub> = 0 V or V+	Full	- 1		1	μA



SPECIFICATIONS (V+ = 3 V)								
		Test ConditionsLimitsOtherwise Unless Specified- 40 °C to 85 °C			°C			
Parameter	Symbol	V+ = 3 V, ± 10 %, V <sub>IN</sub> = 0.4 V or 2 V <sup>e</sup>	Temp. <sup>a</sup>	Min. <sup>b</sup>	Typ. <sup>c</sup>	Max. <sup>b</sup>	Unit	
Dynamic Characteristics								
Turn-On Time <sup>d</sup>	t <sub>ON</sub>	V <sub>NO</sub> or V <sub>NC</sub> = 2 V, R <sub>L</sub> = 300 Ω, C <sub>L</sub> = 35 pF	Room Full		19	51 52		
Turn-Off Time <sup>d</sup>	t <sub>OFF</sub>	fig. 1 and 2	Room Full		17	36 37	ns	
Break-Before-Make Time Delay	t <sub>D</sub>	$V_{NO}$ or $V_{NC}$ = 2 V, $R_L$ = 300 $\Omega$ , $C_L$ = 35 pF (DG2043 Only)	Room	2				
Charge Injection <sup>d</sup>	Q <sub>INJ</sub>	$C_L$ = 1 nF, $V_{GEN}$ = 0 V, $R_{GEN}$ = 0 $\Omega$ , fig. 2	Room		3		рС	
Off-Isolation <sup>d</sup>	OIRR	R <sub>1</sub> = 50 Ω, C <sub>1</sub> = 5 pF, f = 1 MHz	Room		- 63		dB	
Crosstalk <sup>d</sup>	X <sub>TALK</sub>	$n_{\rm L} = 50.52, 0_{\rm L} = 5.01, 1 = 1.10112$	Room		- 94		uВ	
NO, NC Off Capacitance <sup>d</sup>	C <sub>NO(off)</sub> C <sub>NC(off)</sub>	V <sub>IN</sub> = 0 V or V+, f = 1 MHz	Room		25		pF	
Channel-On Capacitance <sup>d</sup>	C <sub>ON</sub>		Room		49			
Power Supply	Power Supply							
Power Supply Current	l+	$V_{IN} = 0 V \text{ or } V+$			0.001	1	μΑ	

<b>SPECIFICATIONS</b> $(V + = 5 V)$							
		Test Conditions Otherwise Unless Specified		- 40	Limits ) °C to 85		
Parameter	Symbol	V+ = 5 V, $\pm$ 10 %, V $_{\rm IN}$ = 0.8 V or 2.4 V $^{\rm e}$	Temp. <sup>a</sup>	Min. <sup>b</sup>	Typ. <sup>c</sup>	Max. <sup>b</sup>	Unit
Analog Switch							
Analog Signal Range <sup>d</sup>	V <sub>NO</sub> , V <sub>NC</sub> V <sub>COM</sub>		Full	0		V+	V
On-Resistance	R <sub>ON</sub>	V+ = 4.5 V, V <sub>COM</sub> = 0.7 V/2.5 V, I <sub>NO</sub> , I <sub>NC</sub> = 10 mA	Room Full		1	1.5 1.6	
R <sub>ON</sub> Flatness <sup>d</sup>	R <sub>ON</sub> Flatness	$V_{+} = 4.5 V, V_{COM} = 0 V \text{ to } V_{+}, I_{NO}, I_{NC} = 10 \text{ mA}$	Room			0.7	Ω
R <sub>ON</sub> Match Between Channels	$\Delta R_{ON}$	VT = 4.5 V, VCOM = 0 V 10 VT, INO, INC = 10 IIIA	Room			0.3	
Switch Off Leakage Current	I <sub>NO(off)</sub> I <sub>NC(off)</sub>	V+ = 5.5 V	Room Full	- 1 - 10		1 10	
Switch On Leakage Suitent	I <sub>COM(off)</sub>	$V_{NO}, V_{NC} = 1 \text{ V/4.5 V}, V_{COM} = 4.5 \text{ V/1 V}$	Room Full	- 1 - 10		1 10	nA
Channel-On Leakage Current	I <sub>COM(on)</sub>	V+ = 5.5 V, V <sub>NO</sub> , V <sub>NC</sub> = V <sub>COM</sub> = 1 V/4.5 V	Room Full	- 1 - 10		1 10	
Digital Control							-
Input High Voltage	V <sub>INH</sub>		Full	2.4			v
Input Low Voltage	V <sub>INL</sub>		Full			0.8	v
Input Capacitance	C <sub>in</sub>		Full		4		pF
Input Current	$I_{\rm INL}$ or $I_{\rm INH}$	V <sub>IN</sub> = 0 V or V+	Full	- 1		1	μA



<b>SPECIFICATIONS</b> $(V + = 5 V)$										
		Test Conditions Limits   Otherwise Unless Specified - 40 °C to 85 °C							°C	
Parameter	Symbol	V+ = 5 V, ± 10 %, V <sub>IN</sub> = 0.8 V or 2.4 V <sup>e</sup>	Temp. <sup>a</sup>	Min. <sup>b</sup>	Typ. <sup>c</sup>	Max. <sup>b</sup>	Unit			
Dynamic Characteristics										
Turn-On Time <sup>d</sup>	t <sub>ON</sub>	$V_{NO}$ or $V_{NC}$ = 3 V, $R_L$ = 300 $\Omega$ , $C_L$ = 35 pF	Room Full		13	42 43				
Turn-Off Time <sup>d</sup>	t <sub>OFF</sub>	fig. 1 and 2	Room Full		19	32 33	ns			
Break-Before-Make Time Delay	t <sub>D</sub>	$V_{NO}$ or $V_{NC}$ = 3 V, $R_L$ = 300 $\Omega$ , $C_L$ = 35 pF (DG2043 Only)	Room	1						
Charge Injection <sup>d</sup>	Q <sub>INJ</sub>	$C_L$ = 1 nF, $V_{GEN}$ = 0 V, $R_{GEN}$ = 0 Ω, fig. 2	Room		3		рС			
Off-Isolation <sup>d</sup>	OIRR	$R_1 = 50 \Omega_1 C_1 = 5 pF_1 f = 1 MHz$	Room		- 63		dB			
Crosstalk <sup>d</sup>	X <sub>TALK</sub>	$H_{L} = 50.52, O_{L} = 5.01, T = 1.10112$	Room		- 93		uБ			
Source-Off Capacitance <sup>d</sup>	C <sub>NO(off)</sub> C <sub>NC(off)</sub>	V <sub>IN</sub> = 0 V or V+, f = 1 MHz	Room		26		pF			
Channel-On Capacitance <sup>d</sup>	C <sub>ON</sub>		Room		49					
Power Supply			•	•		•				
Power Supply Current	l+	V <sub>IN</sub> = 0 V or V+			0.001	1	μA			

Notes:

a. Room = 25  $^{\circ}$ C, full = as determined by the operating suffix.

b. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet.

c. Typical values are for design aid only, not guaranteed nor subject to production testing.

d. Guarantee by design, nor subjected to production test.


e. V<sub>IN</sub> = input voltage to perform proper function.

f. Guaranteed by 5 V leakage testing, not production tested.


Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.




#### TYPICAL CHARACTERISTICS (25 °C unless noted)

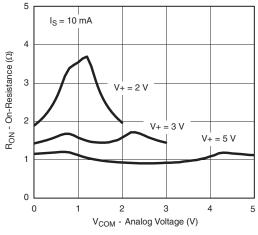



 $\rm R_{ON}$  vs.  $\rm V_{COM}$  and Supply Voltage

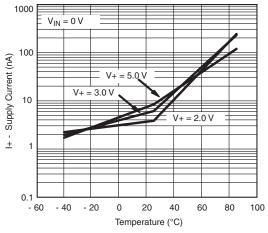


Supply Current vs. Temperature

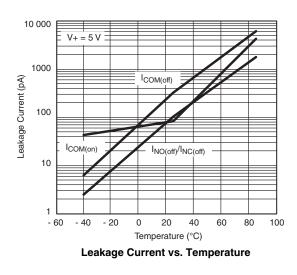

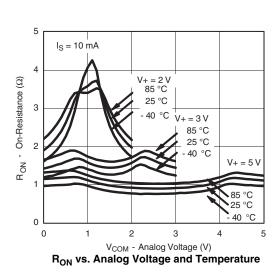

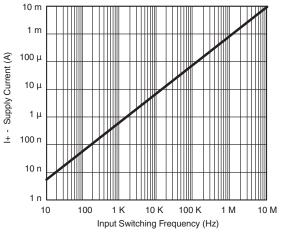



Supply Current vs. Input Switching Frequency

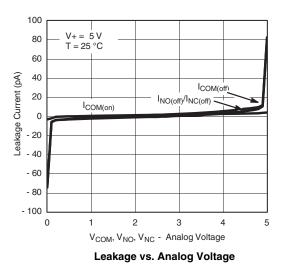


For technical questions, contact: pmostechsupport@vishay.com


## TYPICAL CHARACTERISTICS (25 °C unless noted)

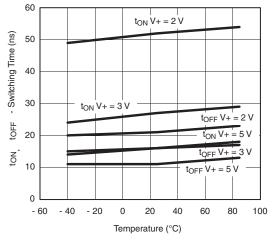



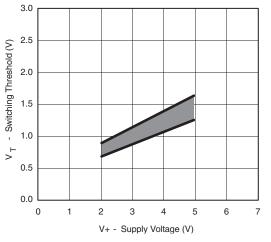


Switching Threshold vs. Supply Voltage

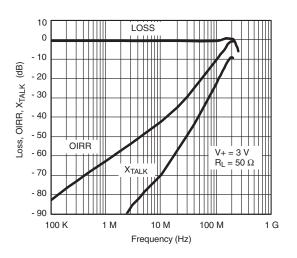

VISHAY

Insertion Loss, Off-Isolation Crosstalk vs. Frequency

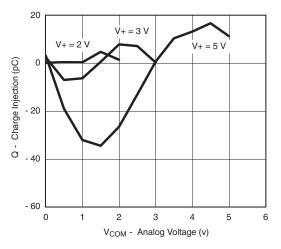

Charge Injection vs. Analog Voltage


Document Number: 72091 S13-1285-Rev. C, 27-May-13




# DG2041, DG2042, DG2043

## Vishay Siliconix


#### **TEST CIRCUITS**

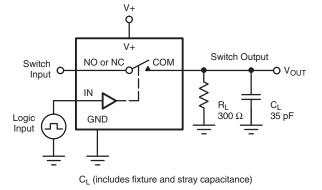





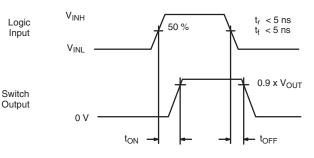


Logic "1" = Switch On Logic input waveforms inverted for switches that have the opposite logic sense.



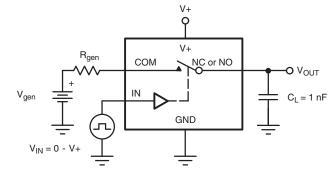

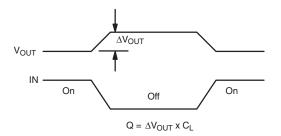

IN depends on switch configuration: input polarity determined by sense of switch.



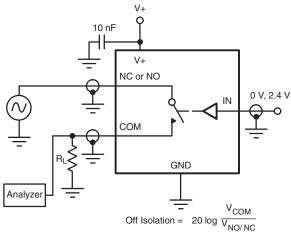


Figure 3. Off-Isolation


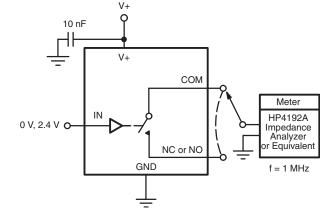



Figure 4. Channel Off/On Capacitance


Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see <a href="http://www.vishay.com/ppg?72091">www.vishay.com/ppg?72091</a>.



QFN 4x4-16L Case Outline



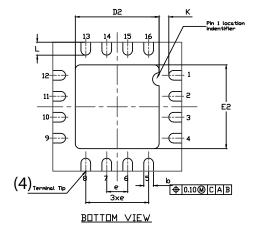



**VARIATION 1 VARIATION 2** MILLIMETERS(1) MILLIMETERS(1) DIM INCHES INCHES MIN. NOM. MAX. MIN. NOM. MAX. MIN. NOM. MAX. MIN. NOM. MAX. 0.75 0.85 0.95 0.029 0.033 0.037 0.75 0.85 0.95 0.029 0.033 0.037 А 0 -0.05 0 0.002 0 0.05 \_ 0.002 A1 -\_ 0 A3 0.20 ref. 0.008 ref. 0.20 ref. 0.008 ref. b 0.25 0.30 0.35 0.010 0.012 0.014 0.25 0.30 0.35 0.010 0.012 0.014 4.00 BSC D 0.157 BSC 4.00 BSC 0.157 BSC 0.087 0.106 2.1 2.2 0.083 2.6 2.7 0.102 D2 2.0 0.079 2.5 0.098 0.65 BSC 0.026 BSC 0.65 BSC 0.026 BSC е Е 4.00 BSC 0.157 BSC 4.00 BSC 0.157 BSC 0.087 2.1 2.2 0.083 2.7 0.102 0.106 2.6 E2 2.0 0.079 2.5 0.098 0.20 min. 0.008 min 0.20 min. 0.008 min. Κ 0.5 0.7 0.020 0.024 0.028 0.5 0.016 0.020 L 0.6 0.3 0.4 0.012 N<sup>(3)</sup> 16 16 16 16 Nd<sup>(3)</sup> 4 4 4 4 Ne<sup>(3)</sup> 4 4 4 4

#### Notes

<sup>(1)</sup> Use millimeters as the primary measurement.

<sup>(2)</sup> Dimensioning and tolerances conform to ASME Y14.5M. - 1994.

<sup>(3)</sup> N is the number of terminals. Nd and Ne is the number of terminals in each D and E site respectively.

<sup>(4)</sup> Dimensions b applies to plated terminal and is measured between 0.15 mm and 0.30 mm from terminal tip.

<sup>(5)</sup> The pin 1 identifier must be existed on the top surface of the package by using identification mark or other feature of package body.

<sup>(6)</sup> Package warpage max. 0.05 mm.

ECN: S13-0893-Rev. B, 22-Apr-13 DWG: 5890

1

Document Number: 71921


For technical questions, contact: <u>powerictechsupport@vishay.com</u> THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT <u>www.vishay.com/doc?91000</u>




# Package Information

Vishay Siliconix

### TSSOP: 16-LEAD

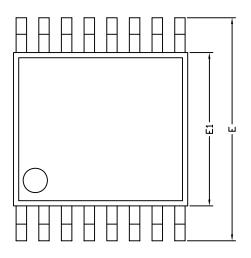

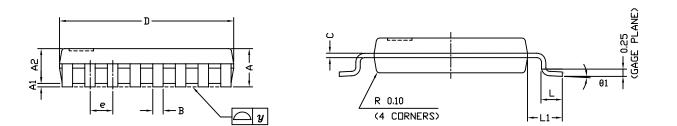


	C	DIMENSIONS IN MILLIMETERS						
Symbols	Min	Nom	Max					
A	-	1.10	1.20					
A1	0.05	0.10	0.15					
A2	-	1.00	1.05					
В	0.22	0.28	0.38					
С	-	0.127	-					
D	4.90	5.00	5.10					
E	6.10	6.40	6.70					
E1	4.30	4.40	4.50					
е	-	0.65	-					
L	0.50	0.60	0.70					
L1	0.90	1.00	1.10					
у	-	-	0.10					
θ1	0°	3°	6°					
ECN: S-61920-Rev. D, 23 DWG: 5624	-Oct-06							



**PAD** Pattern

Vishay Siliconix

#### **RECOMMENDED MINIMUM PAD FOR TSSOP-16**

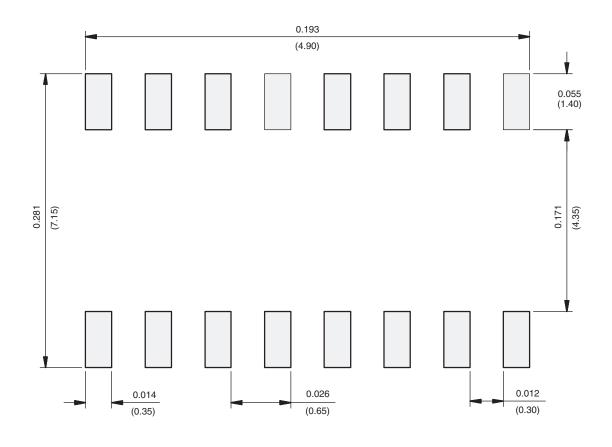

Recommended Minimum Pads Dimensions in inches (mm)



Vishay

# Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.